



10 Watt Series

Wall Mount Type

USA / Japan / Taiwan / Europe / UK / China

Green Mode

Meet CEC, Energy Star & ErP Regulations
No Load Power Consumption Less Than 0.3W

Features:


- 100-240VAC Universal Input
- Single Output to 10W
- Regulated Output with Low Ripple Noise
- Meets Safety Agency Requirements and Complies EMI/EMS
- Private Label Marking Available
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
STD-03320U2/E2/B2/C2	3.3V	2.0A	6.60W
STD-04520U2/E2/B2/C2	4.5V	2.0A	9.00W
STD-05020U2/E2/B2/C2	5.0V	2.0A	10.00W
STD-05026U2/E2/B2/C2	5.0V	2.5A	12.50W
STD-06020U2/E2/B2/C2	6.0V	2.0A	12.00W
STD-07514U2/E2/B2/C2	7.5V	1.4A	10.50W
STD-08413U2/E2/B2/C2	8.4V	1.3A	10.92W
STD-09012U2/E2/B2/C2	9.0V	1.2A	10.80W
STD-12010U2/E2/B2/C2	12.0V	1.0A	12.00W
STD-13508U2/E2/B2/C2	13.5V	0.8A	10.80W
STD-15008U2/E2/B2/C2	15.0V	0.8A	12.00W
STD-18006U2/E2/B2/C2	18.0V	0.66A	11.88W
STD-24005U2/E2/B2/C2	24.0V	0.5A	12.00W

Input	
Voltage	100-240 VAC
Line Frequency	50-60Hz
Current	0.31A Max.
Protection	Internal Primary Current Fuse, Inrush Limiting
AC Inlet	U2 for US AC Pin (Side) E2 for EU Pin B2 for UK Pin C2 for CN Pin

Output	
Load Regulation	± 5% (Typical)
Ripple	1~2%V p-p Max. for Output Voltage@ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Holdup Time	10mS @ Full Load
Protection	Short Circuit Protection/ Over Voltage Protection/ Over Current Protection
DC Cord	22AWG / 20AWG / 18AWG
Ferrite Core	Yes

STD-□□□ □□ □

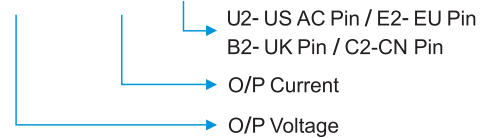

Safety Approvals

For USA- CB / UL / cUL / FCC / PSE / BSMI / LPS
For Europe- CB / GS / CE / LPS
For UK- CB / CE / LPS
For China- CB/ CCC/ LPS

Electrical

Topology	Switching Flyback
Dielectric Withstand	3000 VAC Primary - Secondary
Leakage Current	0.25mA @ 2 Pin
Efficiency	Meet Energy Star Level V & ErP Stage 2 & MEPS
EMI Conduction & Radiation	Compliance to EN55022 Class B
Harmonic Current	Compliance to EN61000-3-2,3
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11
MTBF	50,000 Calculated Hours at 25°C, by MIL- HDBK-217F

Environmental

Operating Temperature	0 to+40°C
Storage Temperature	-20 to+80°C
Relative Humidity	Operating: 20 to 80% RH Storage: 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	U2 - L 72 x W 34 x H 59 (mm) E2 - L 72 x W 34 x H 80 (mm) B2 - L 72 x W 50 x H 72 (mm) C2 - L 72 x W 34 x H 58 (mm)
Weight	U2&C2 :126g /E2:128g / B2:130g (reference)

