



Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing
6	7.62	5.08	10.16	7.62	03
8	10.16	7.62	10.16	7.62	
14	17.78	15.24	10.16	7.62	
16	20.32	17.78	10.16	7.62	
18	22.86	20.32	10.16	7.62	
20	25.40	22.86	10.16	7.62	
24	30.48	27.94	10.16	7.62	04
28	35.56	33.02	10.16	7.62	
22	27.94	25.40	12.70	10.16	
24	30.48	27.94	17.78	15.24	
28	35.56	33.02	17.78	15.24	06
32	40.64	38.10	17.78	15.24	
40	50.80	48.26	17.78	15.24	
42	53.34	50.80	17.78	15.24	
48	60.96	58.42	17.78	15.24	



DRAWN: OZR

CHECKED: Jeremy Liu

APPROVAL: Mike Wu

GENERAL TOLERANCE:  
.X = ±0.2  
.XX = ±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:



繼德工業股份有限公司  
**Neutron Industrial Co., Ltd.**

DESCRIPTION: 2.54mm IC Socket Stamp Pin


PART NO: 2227-XX-XX

SIZE

**A4**

Specifications:  
Current rating: 1.0A AC,DC  
Voltage rating: 250V AC,DC  
Contact resistance: 15m ohm max  
Insulator resistance: 5000M ohm min  
Dielectric withstanding voltage: 1000V AC/minute  
Operating temperature: -40°C to +105°C  
Material:  
Insulator: High Temp. Plastic UL 94V-0  
Standard Color: Black  
Contacts: Copper Alloy  
Finish: Tin Plating  
How To Order  
2227-XX-XX

03: Space: 7.62mm  
04: Space: 10.16mm  
06: Space: 15.24mm  
NO. Of Position

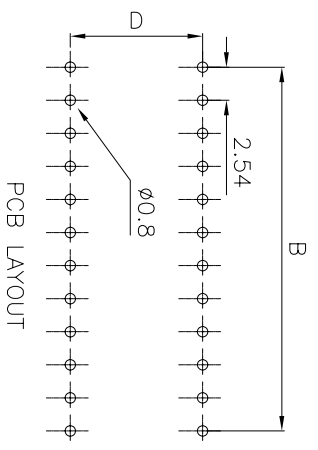

REV	DATE	FILE	BY
A	01-26-1999		Jack
B	JUN-15-2004		Maryann
C	JUL-19-2005	ENC-CN050722	OZR
D	JAN-25-2006	ENC-CN060113	OZR
E			