

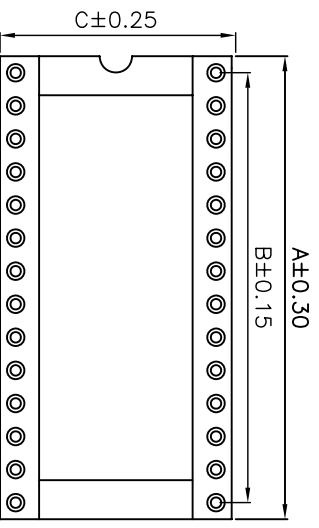

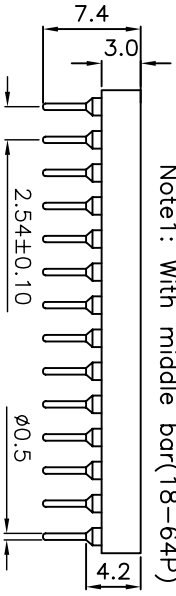
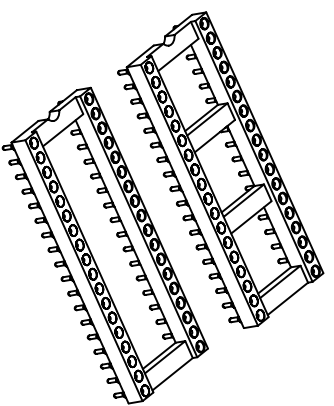


Note1: With middle bar(18-64P)



Note2: W/O middle bar(6-16P)

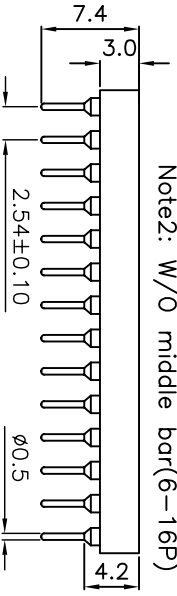

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing
6	7.62	5.08	10.16	7.62	
8	10.16	7.62	10.16	7.62	
14	17.78	15.24	10.16	7.62	
16	20.32	17.78	10.16	7.62	03
18	22.86	20.32	10.16	7.62	
20	25.40	22.86	10.16	7.62	
24	30.48	27.94	10.16	7.62	
28	35.56	33.02	10.16	7.62	
22	27.94	25.40	12.70	10.16	04
24	30.48	27.94	17.78	15.24	
28	35.56	33.02	17.78	15.24	
32	40.64	38.10	17.78	15.24	06
40	50.80	48.26	17.78	15.24	
42	53.34	50.80	17.78	15.24	
48	60.96	58.42	17.78	15.24	
64	81.28	78.74	26.00	22.86	09

*2227MC-16-03-BA

With Bar

GENERAL TOLERANCE:

.X = ±0.2
.XX = ±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:



繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION:

2.54mm IC Socket Machine Pin

PART NO:


2227MC-XX-XX

SIZE

A4

Specifications:

- Current rating:1.0A AC/DC
- Voltage rating:100V AC/DC
- Contact resistance:10m ohm. max.
- Insulator resistance:5000M ohm. Min.
- Withstanding voltage:1000V AC for one minute
- Operating temperature range:-40°C to +105°C
- Material and Finish:
- Insulator:High Temp. Plastic(UL94V-0)
- Standard Color:Black
- Contact:Beryllium Copper(Becu)
- Finish:Gold/Tin Plated
- How To Order
- 2227MC-XX-XX
- 03: Space:7.62mm
- 04: Space:10.16mm
- 06: Space:15.24mm
- 09: Space:22.86mm
- NO. Of Contacts
- MC: Machine Pin

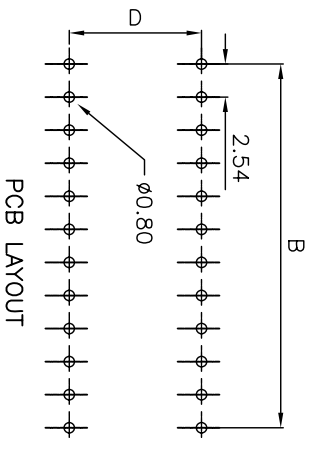

PCB LAYOUT

REV	DATE	FILE	BY	DRAWN:	CHECKED:	APPROVAL:
E				OZR		
D						
C	JUL-19-2005	EMC-CN050722	OZR		Jeremy Liu	
B	JUN-15-2004		Maryann			
A	01-26-1999		Jack			
					Mike Wu	