

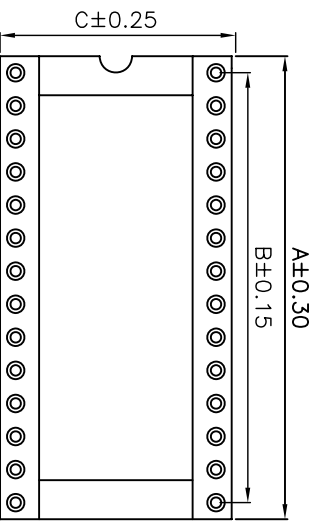

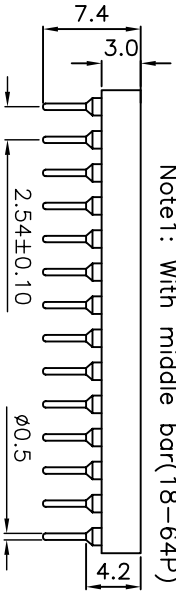
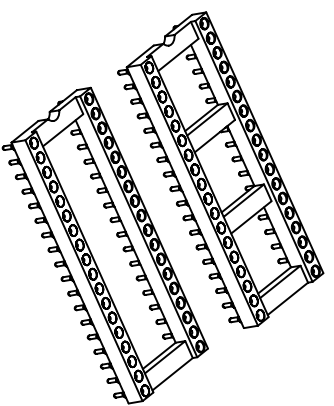


Note1: With middle bar(18-64P)



Note2: W/O middle bar(6-16P)

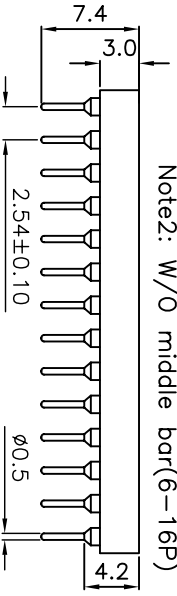



Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing
6	7.62	5.08	10.16	7.62	03
8	10.16	7.62	10.16	7.62	
14	17.78	15.24	10.16	7.62	
16	20.32	17.78	10.16	7.62	
18	22.86	20.32	10.16	7.62	
20	25.40	22.86	10.16	7.62	
24	30.48	27.94	10.16	7.62	04
28	35.56	33.02	10.16	7.62	
22	27.94	25.40	12.70	10.16	
24	30.48	27.94	17.78	15.24	
28	35.56	33.02	17.78	15.24	06
32	40.64	38.10	17.78	15.24	
40	50.80	48.26	17.78	15.24	
42	53.34	50.80	17.78	15.24	
48	60.96	58.42	17.78	15.24	09
64	81.28	78.74	26.00	22.86	

*2227MC-16-03-BA

With Bar

Specifications:

- Current ratings:1.0A AC/DC
- Voltage rating:100V AC/DC
- Contact resistance:10m ohm. max.
- Insulator resistance:5000M ohm. Min.
- Withstanding voltage:1000V AC for one minute
- Operating temperature range:-40°C to +105°C
- Material and Finish:
- Insulator:High Temp. Plastic(UL94V-0)
- Standard Color:Black
- Contact:Beryllium Copper(Becu)
- Finish:Gold/Tin Plated
- How To Order
- 2227MC-XX-XX

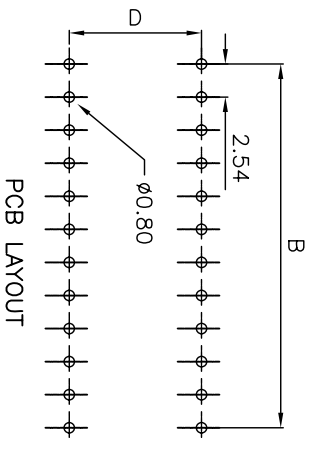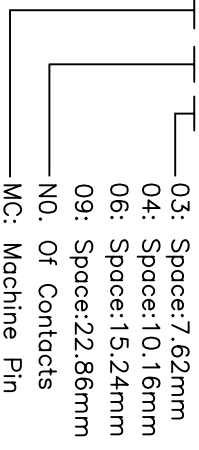

PCB LAYOUT

REV	DATE	FILE	BY	DRAWN:	OZR
A	01-26-1999		Jack	CHECKED:	Jeremy Liu
B	JUN-15-2004		Maryann	APPROVAL:	Mike Wu
C	JUL-19-2005	EMC-CN050722	OZR		
D					
E					

GENERAL TOLERANCE:	.X = ±0.2 .XX = ±0.15
UNIT: MM	
SCALE:	
SHEET: 1 / 1	
PROJECTION:	

DESCRIPTION:	2.54mm IC Socket Machine Pin	PART NO:	2227MC-XX-XX
<p>繼德工業股份有限公司 Neltron Industrial Co., Ltd.</p>		SIZE	A4