


# ツマミ各種

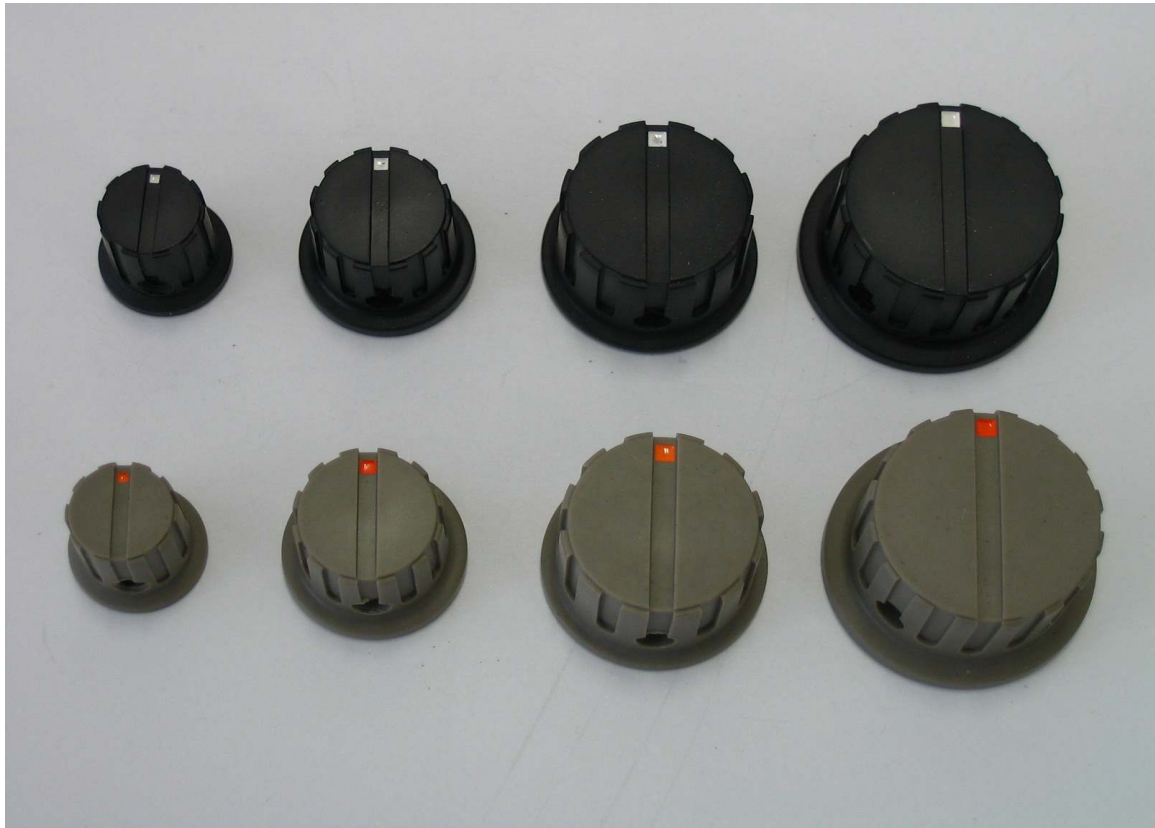

	図面 (mm)	D	M	H	L	シャフト径	取付方法	色
B-15 3φ		15.0	11.7	14.0	11.8	3φ	M3イモネジ	黒
B-15		15.0	11.7	14.0	11.8		M3イモネジ	黒/灰
B-20		20.0	15.7	14.8	11.8		M4イモネジ	黒/灰
B-25		24.0	19.0	16.4	14.0		M4イモネジ×2	黒/灰
B-30		30.0	24.5	17.2	15.8		M3イモネジ	黒
BM-15		15.0	11.7	14.0	11.8		M4イモネジ	
BM-20		20.0	15.7	14.8	11.8	M4イモネジ×2		
BM-25		24.0	19.0	16.4	14.0	ローレット式		
BM-30		30.0	24.5	17.2	15.8	6φ	M3イモネジ	黒
BR-15		15.0	11.7	14.0	11.8		M4イモネジ	
BR-20		20.0	15.7	14.8	11.8		M4イモネジ×2	
BR-25		24.0	19.0	16.4	14.0		ローレット式	
BR-30		30.0	24.5	17.2	15.8	6φ	M3イモネジ	黒
C-1S		18.8	15.7	11.1	9.0		M4イモネジ	
CM-15S	21.8	18.9	13.5	10.7	M4イモネジ×2			
CM-2S	25.7	22.6	14.4	11.9				
CM-3S	32.8	29.9	16.1	15.0				