


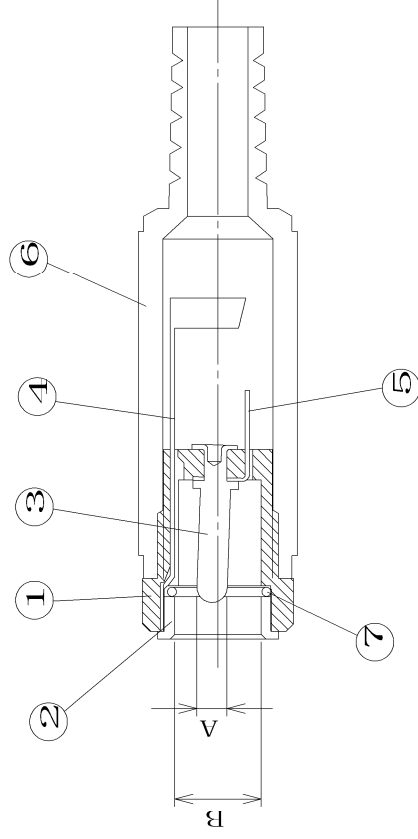

	A部	B部
MJ-077NH	$\Phi 2$	$\phi 5.7$
MJ-078NH	$\Phi 2.35$	$\phi 5.7$

RoHS対応品

仕 様 SPECIFICATION		
1. 定 格:	MJ-077NH	DC12V 6A DC24V 3A
RATING	MJ-078NH	DC12V 6A DC24V 3A
2. 絶縁抵抗:DC500V/100MΩ以上。		
INSULATION RESISTANCE:100MΩMIN./500V DC.		
3. 耐電圧	:AC500V 1分間。	
BREAKDOWN VOLTAGE:500V AC FOR 1MINUTE.		

UL FILE No. E48285

UL FILE NO. E48285												
7	接続ハネ CONTACT キヤップ	PBW	1	Ni		TOLERANCE	SCALE	DATE	DESIGN	DRAW	INSPE	APRO
6		PE	1			+0.3	2 / 1	2025/6/24	N, S	N, S	S, I	S, I
5	ラック B TERMINAL B	BSR	1	Ni		MODEL		QTY	PART NAME	DCインラインジグ	ヤツク DC IN-LINE JACKS	
4	ラック A TERMINAL A	BSR	1	Ni		型式			品名	MJ-077NH / MJ-078NH		
3	ピン PIN	BSBM	1	Ni		MATERIAL			DRAW. NO	MJ-077NH		
2	リソク METAL	BSBM	1	Ni		材質			図番			
1	ボディー BODY	PA	1			FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理		 MARUSHIN ELECTRIC MFG. CO., LTD.				