

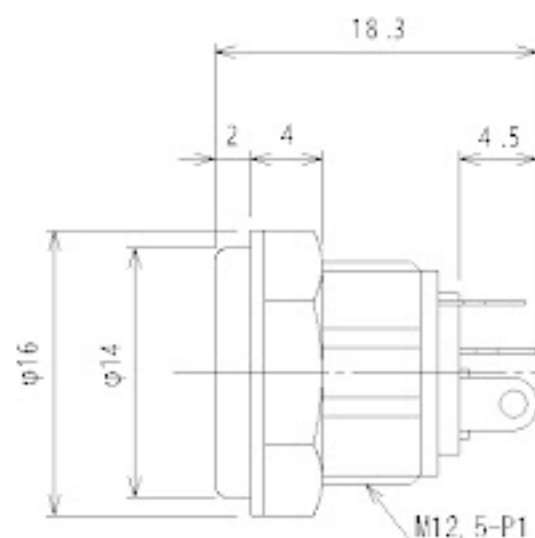


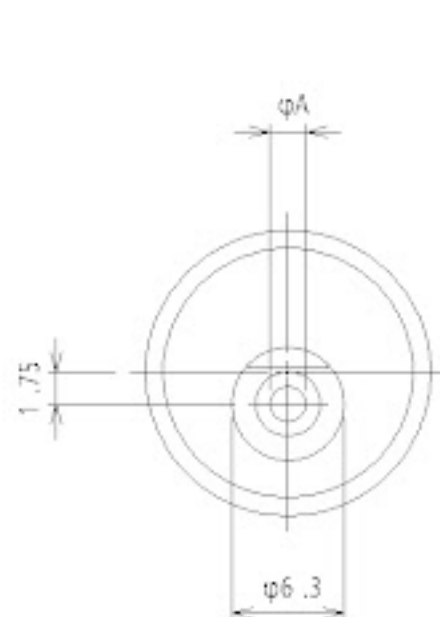


A	
MJ-10H	φ1.95 ^{+0.03} ₋₀
MJ-11H	φ2.35 ^{+0.05} ₋₀

仕様 SPECIFICATION

1. 定格: MJ-10H= DC12V 3A DC24V 1.5A
RATING MJ-11H= DC12V 3A DC24V 1.5A
terminal of break-shunt spring
=DC12V 2A
2. 接触抵抗: 30 mΩ 以下。
CONTACT RESISTANCE:
30 mΩ MAX.
3. 絶縁抵抗: DC500V/100 MΩ 以上。
INSULATION RESISTANCE:
DC500V/100 MΩ MIN.
4. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1 MINUTE.
5. 適合プラグ: MJ-10H= 05.5 x2.1
MATE PLUG MJ-11H= 05.5 x2.5

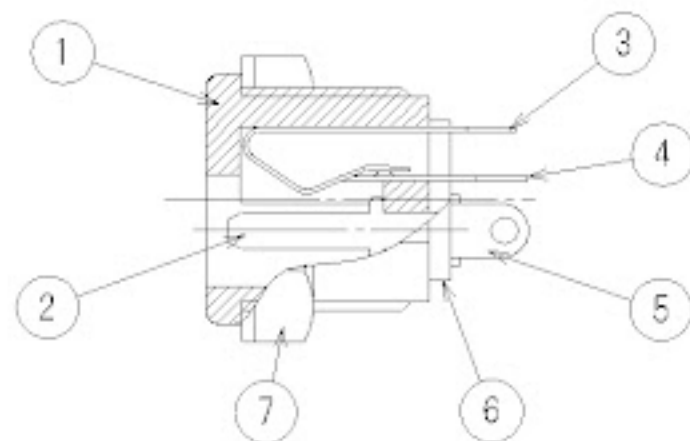

取付穴参考寸法 MOUNTING HOLE DIMENSION

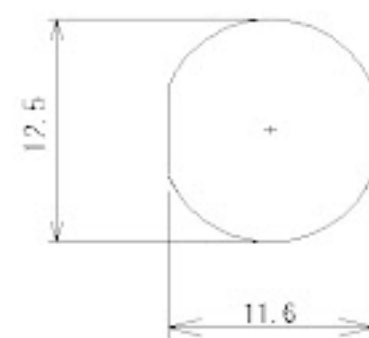

回路



TOLERANCE	SCALE	DATE	DESIGN	DRAWN	INSPE	APPRO
±0.3	2 / 1	2025/6/4	K.S	K.S	K.S	N.I
MODEL 形式	QTY		PART NAME 品名	DC ジャック DC JACK No, MJ-10H / No, MJ-11H		
MATERIAL 材質	DRAW. NO 図番		MJ10H			
FINISH 処理	 MARUSHIN ELECTRIC MFG. CO., LTD.					

LET	PART NAME	MATERIAL	QTY	FINISH	NOTE
7	NUT ナット	P.A	1		
6	INSULATOR 絶縁体	PBT G30%	1		
5	TERMINAL B センター端子	BRASS 黄銅	1	Ag	
4	TERMINAL A 固定端子 (B)	BRASS 黄銅	1	Ag	
3	CONTACT SPRING 可動端子 (S)	PBS リン青銅	1	Ag	
2	PIN センターピン (J)	BRASS 黄銅	1	Ni	
1	BODY 本体	PBT G15%	1		