

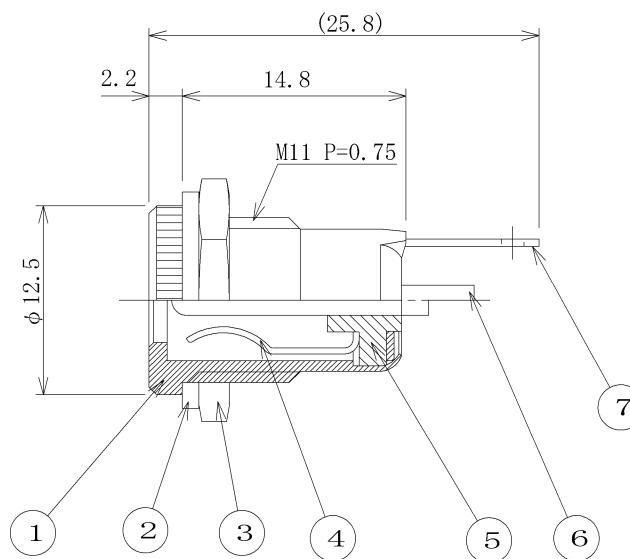


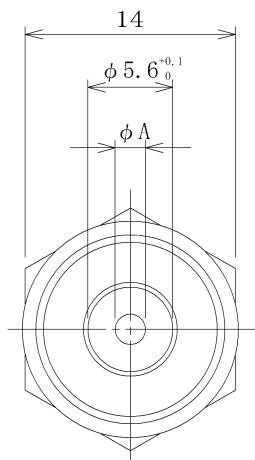


仕 様
SPECIFICATION

1. 定格 : DC12V 8A DC24V 4A
RATING
2. 絶縁抵抗: DC500V/100M Ω 以上。
INSULATION RESISTANCE:
DC500V/100M Ω MIN.
3. 耐電圧 : AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

回 路
CIRCUIT



取付け穴参考寸法



	A部	適合フﾟラクﾟ MATE PLUG
MJ-21AMH	$\phi 1.95^{\pm 0.05}$	$\phi 5.5 \times \phi 2.1$
MJ-22AMH	$\phi 2.35^{\pm 0.05}$	$\phi 5.5 \times \phi 2.5$

							TOLERANCES	SCALE	DATE	DRAW	INSPE	APPRO
7	端 子	TERMINAL	鉄	STEEL	1	Ni	7 ≤ 14 : ±0.3 14 ≤ 25 : ±0.5 25 ≤ 50 : ±0.7 ANGULAR :	2/1	2025/6/10	N, S	S, I	S, I
6	センターピン	PIN	黄 銅	BSBM	1	Ni						
5	絶 縁 体	INSULATOR	PEEK	PEEK	1							
4	ハﾟネ	CONTACT	磷 青 銅	PBR	1	Ni						
3	ナット	NUT	鉄	STEEL	1	Ni	REMARKS	DRAW. NO 図番				
2	ワッシャー	WASHER	鉄	STEEL	1	Ni						
1	本 体	BODY	黄 銅	BSBM	1	Ni		EST				
LET	PART NAME		MATERIAL	QTY	FINISH	NOTE						

MARUSHIN ELECTRIC MFG. CO., LTD.