

Open Frame Power Supply 612 Watt Series

ATM600 - F X X X

Q / P Voltage ←

Features :


- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC : IEC60601-1-2 (Edition 4.1)
- Means of Protection : 2 X MOPP
- IEC/EN/UL 62368-1
- 100-240VAC Universal Input
- Standby 5V / 1A
- On & Off Remote Control
- Efficiency up to 95%
- Regulated Output With Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Model	O/P Voltage	O/P Current	Standby	O/P for Fan	Watt
ATM600-F120	12.0V	50.0A	5V / 1A	12V / 0.6A	612W
ATM600-F240	24.0V	25.0A	5V / 1A	12V / 0.6A	612W
ATM600-F360	36.0V	16.6A	5V / 1A	12V / 0.6A	612W
ATM600-F480	48.0V	12.5A	5V / 1A	12V / 0.6A	612W

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	7.0A-2.7A
Protection	Internal Primary Current Fuse

Derating Curve

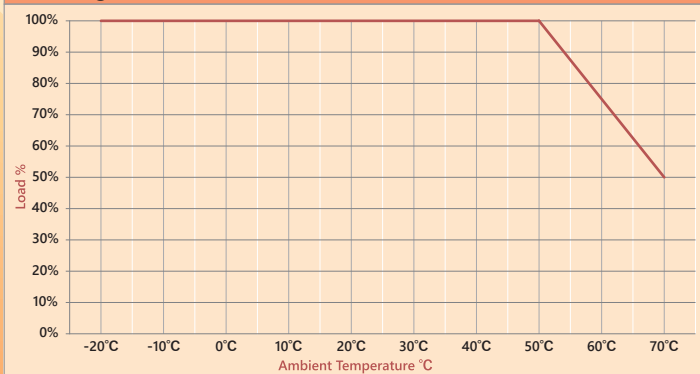

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤1% Vp-p @ Full Load
Transient(Dynamic) Response	0.5mS for 50% Load Change Typical
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS@ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current(Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 50°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Dimension	L 203 × W 127 × H 40 (mm) 8" x 5" x 1.6"
Weight	1,100g (Ref.)