



36 Watt Series

Desktop Type

ATM036T - X X X

P : C14

A : C8 / C18

O / P Voltage



Features :

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC : IEC60601-1-2 (Edition 4.1)
- Means of Protection: 2 X MOPP
- 100-240VAC Universal Input
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Modified and Custom Design Available
- 2 Years Warranty

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 2% Vp-p @ Full Load
Transient(Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection

Model	O/P Voltage	O/P Current	Watt
ATM036T-□050	5.0V	5.0A	25W
ATM036T-□075	7.5V	4.0A	30W
ATM036T-□090	9.0V	4.0A	36W
ATM036T-□120	12.0V	3.0A	36W
ATM036T-□150	15.0V	2.4A	36W
ATM036T-□180	18.0V	2.0A	36W
ATM036T-□240	24.0V	1.5A	36W

Electrical

Topology	Switching Flyback
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100µA
Earth Leakage Current	< 5mA
Efficiency	Meet DoE Level VI, ErP Stage 2
EMC Standards	EN55011
	EN61000-3-2,3
	EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332


Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	1.0A-0.45A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C8, C14, C18

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Derating Curve

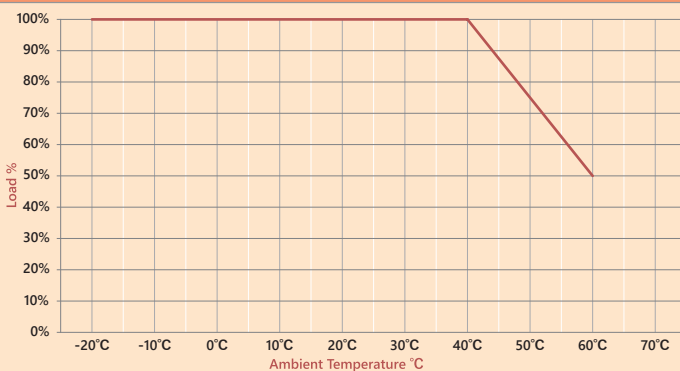

Mechanical

Case Dimension	C14 & C18 - L 100 × W 50 × H 33 (mm)
	C8 - L 99 × W 50 × H 33 (mm)
Weight	210g (Ref.)